




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/56		A1	(11) International Publication Number: WO 97/16005
			(43) International Publication Date: 1 May 1997 (01.05.97)
(21) International Application Number: PCT/CA96/00710		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 25 October 1996 (25.10.96)		<p>Published With international search report.</p>	
(30) Priority Data: 9521831.9 25 October 1995 (25.10.95) GB			
(71) Applicant (for all designated States except US): NEWBRIDGE NETWORKS CORPORATION [CA/CA]; 600 March Road, P.O. Box 13600, Kanata, Ontario K2K 2E6 (CA).			
(72) Inventors; and (75) Inventors/Applicants (for US only): McALLISTER, Shawn [CA/CA]; 13 Rosemeade Place, Nepean, Ontario K2G 5V9 (CA). BEHKEI, Nutan [CA/CA]; 40 Moorcroft Road, Nepean, Ontario K2G 0M7 (CA). CHAN, Richard [CA/CA]; 19 Silver Horse Cres., Kanata, Ontario K2M 2J2 (CA).			
(74) Agent: MITCHELL, Richard, J.; Marks & Clerk, Station B, P.O. Box 957, Ottawa, Ontario K1P 5S7 (CA).			

(54) Title: SVC ROUTING IN NETWORK WITH STATIC ROUTING TABLES

(57) Abstract

A method is disclosed for establishing a switched virtual circuit in a digital network having network nodes with static routing tables. The static routing tables contain at least primary and alternate routing data. When a node is unable to forward a call over its outgoing primary route due to congestion or physical failure and its alternate route is the same as the route on which a call setup request arrived, it clears the call at that node and sends a crankback message to the preceding node, which responds to the crankback message to attempt to dynamically re-route the call over the alternate route stored in the routing table of the preceding node. If the attempt is unsuccessful, it sends the message back to the next preceding node and so on.

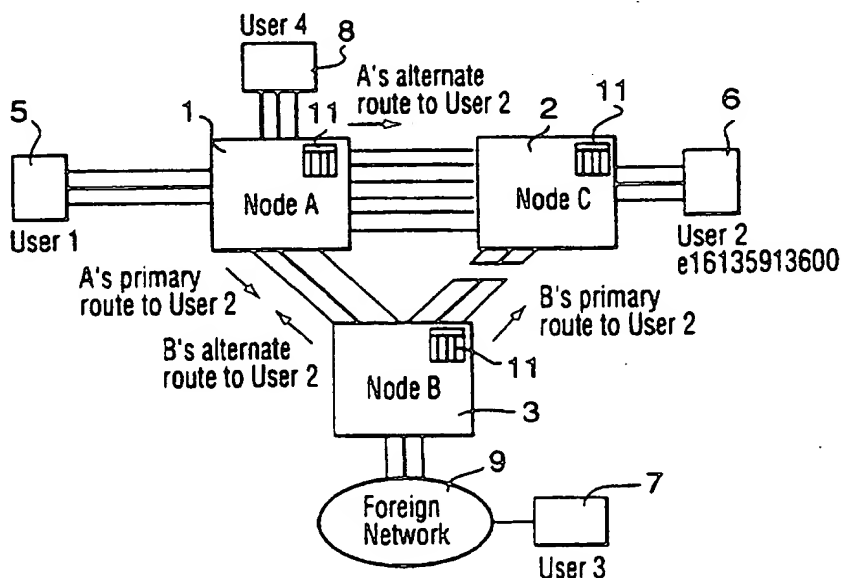

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

- 1 -

SVC ROUTING IN NETWORK WITH STATIC ROUTING TABLES

This invention relates to a method of establishing a switched virtual circuit in digital networks with static routing tables. The invention is applicable to any technology in which switched virtual circuits are set up through a packet switched
5 network, for example, ATM and Frame Relay networks.

Congestion may occur on a network link if many incoming streams of traffic all terminate on the same outbound link, or the outbound link may busy or down due to a failure. Congestion is a problem in all networks. In packet switched networks, congestion is handled by end to end applications. There are no methods for handling
10 congestion at the packet routing level. In circuit switched networks, bandwidth is reserved for each circuit by the network operator. Once again, there are no methods for handling congestion.

In networks which use switched virtual circuits (SVCs), a method is needed to reroute around congested or failed links. In the P-NNI protocol, which applies to
15 dynamically routed SVC networks, a crankback IE (Information Element) is used for rerouting. When a node receives a call set-up request with which it is unable to comply, it sends a crankback IE back through the network. This IE passes through several nodes until it reaches a node which is programmed to respond to a crankback IE. This node, which is equipped to respond to a crankback element, then attempts to
20 re-route the call on the basis of its current routing table.

This method, however, cannot be used in statically routed SVC networks, where the nodes contain manually pre-configured routing tables, which predetermine the path through the network that a call between any two endpoints will take. Furthermore, there is no mechanism to prevent continuous crankback attempts. In a
25 network with static routing tables, failure in one of the configured links will result in failure of the call set-up process.

Routing loops may occur due to configuration errors, the use of alternate routes when failures occur, or transient routing tables after a failure in the network. Routing loops are also a problem in all networks. In statically routed packet and

- 2 -

circuit switched networks, loops are assumed to be detected by the network operator. No loop detection mechanisms are present in these networks.

In networks which use switched virtual circuits, both transient loops and permanent loops are a problem. A reliable method of loop detection is therefore
5 needed in these networks. The P-NNI protocol uses source routing to avoid loops. This adds unnecessary complexity to SVC routing.

An object of the invention is to alleviate these disadvantages.

According to the present invention there is provided a method of establishing a
switched virtual circuit in a digital network having network nodes with static routing
10 tables, characterized in that said static routing tables contain at least primary and alternate routing data, and that when a node is unable to forward a call over its outgoing primary route due to congestion or physical failure and its alternate route is the same as the route on which a call setup request arrived, it clears the call at that node and sends a crankback message to the preceding node which responds to said
15 crankback message to attempt to dynamically re-route the call over the alternate route stored in the routing table of the preceding node, and if not sends the message back to the next preceding node and so on.

This method gives statically routed SVC networks some of the capabilities of dynamically routed networks, in that a failure on the primary route does not
20 necessarily means that the call set-up attempt will fail. This method can prevent routing loops from occurring without the added processing and memory burden of source routing.

Preferably, the crankback IE has a predetermined lifetime to prevent continuous crankback attempts.

25 The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 shows a portion of a digital network showing how the system routes SVCs around failures; and

- 3 -

Figure 2 illustrates the network with a different trunk group down and showing an extra node.

Figure 1 shows a digital network comprising three switching nodes A, B, C, referred to as node A, node B, and node C, for example, ATM switches, and four users 5, 6, 7, 8, referred to as user 1, user 2, user 3, and user 4. User 1 and user 4 are connected to Node A, user 2 is connected to node C, and user 3 is connected to through a "foreign" network 9 to Node B. The nodes are connected via trunks 1 carrying SVCs (Switched Virtual Circuits).

Each node contains a routing table 11 which is manually preconfigured when the network is setup to store the routes to possible endpoints from the node. The routing tables 11 contain information pertaining to a primary route and an alternate route to use in the event that there is a failure or congestion on the primary route.

Suppose that the Primary Route for Node A, as stored in its routing table 11, to reach User 2 is via Node B and the Alternate Route is via Node C. On Node B, the Primary Route to User 2 is via Node C and an Alternate Route is via Node A.

In this example, all Trunk Groups between Node B and Node C are assumed to be down. A Setup message from User 1 to User 2 is routed by Node A to Node B in accordance with the information stored in its routing table 11. Node B detects that the Trunk Group in its Primary Route (via Node C) is down, so its Primary Route cannot be used. Node B also detects that its Alternate Route to User 2 is the same Route on which the setup message was received. Routing the call out the Alternate Route would therefore cause a loop and Node B therefore determines that it cannot forward the call to User 2 and clears the call back to Node A with a Release message indicating Crankback.

Node A receives the Crankback message, notes that its Primary Route didn't work and forwards the call on its Alternate Route, as stored in its routing table 11, to Node C. Node C then forwards the call to User 2. Without Crankback, the Trunk

- 4 -

Group failure between Node B and Node C would prevent User 1 from establishing an SVC to User 2.

If this attempt fails, node A attempts to repeat the process back to the next preceding node and so on back through the network. In this example, the next
5 preceding node is the originating user 1, so the call is cleared.

Crankback thus operates by regressing a call in progress back to a previous node in the call setup path to try an alternate route from that point. When a node cannot forward a call along its configured path, it clears the call at that node and sends a Release message to the previous node (called the Crankback destination) and
10 includes a Crankback Information Element in the Release message to indicate Crankback (as opposed to normal call clearing). The Crankback destination has a record of the Route and Route List it used to forward this call. Upon receiving the Crankback, the Crankback destination knows that the Route it chose cannot be used to establish this call. It therefore chooses the next best Route from the Route List to
15 forward the call. This newly-selected Route will take the call to a different node in an attempt to route around the failure. If there are no other Routes to chose from in the Route List, then the call is cranked back one more hop. If Crankback reaches the originating node and an alternate Route cannot be found, then the call is cleared back to the calling party.

20 In order to bound the number of SVC re-routing attempts, Crankback will be attempted only up to a maximum number of times before the call is cleared back to the originator. This is controlled using a hop count or time-to-live field in the signalling message. This field starts at a specific value and is decremented each time the signalling message is forwarded by an intermediate switch. When the field reaches
25 a predetermined value, for example, zero, the call is cleared.

The use of static routing with alternate routes may also cause routing loops during failure conditions. Manually configuring SVC routing tables node by node, can also cause routing loops to be erroneously introduced. Loop detection is used to detect a looped Set-up or Add Party message and will either clear the call or use

- 5 -

Crankback to indicate to previous nodes in the setup path that an alternate route must be chosen.

In the network shown in Figure 2, and additional node 10, referred to as node D is located between node C and user 2. If we assume that user 1 is establishing an SVC to User 2, node A's Primary Route to User 2 is via Node C, with its Alternate Route via Node B. The Primary Route from Node C to User 2 is via Node D with an Alternate Route via Node B.

When the Setup message arrives at Node C from Node A, Node C determines that its Primary Route is inoperative, and forwards the call along its Alternate Route to Node B. Node B sends the call along its primary route to Node A. Node A detects the routing loop and clears the call back to Node B in a Release message indicating Crankback. Node B then chooses its Alternate Route and forwards the call to Node D, which delivers the call to User 2.

Looping of SVC Setup or Add Party messages can occur due to routing configuration errors or due to the use of alternate routes when failures occur. SVC looping in case 2 is detected with the use of a proprietary Transit List Information Element (IE) in the signalling messages. This IE (Information Element) records the nodes visited during the call setup. Upon detection of SVC looping, the detecting node cranks the call back to the previous node to allow rerouting to occur.



The described method enhances the crankback mechanism and allows its use in statically routed SVC networks. It also prevents looping in a simple and effective manner.

-6-

Claims:

1. A method of establishing a switched virtual circuit in a digital network having network nodes with static routing tables, characterized in that said static routing tables contain at least primary and alternate routing data, and that when a node is unable to
5 forward a call over its outgoing primary route due to congestion or physical failure and its alternate route is the same as the route on which a call setup request arrived, it clears the call at that node and sends a crankback message to the preceding node which responds to said crankback message to attempt to dynamically re-route the call over the alternate route stored in the routing table of the preceding node, and if not
10 sends the message back to the next preceding node and so on.
2. A method as claimed in claim 1, characterized in that said call is cleared when the crankback message reaches the originating endpoint.
3. A method as claimed in claim 1, characterized in that said crankback message has a predetermined lifetime to prevent continuous crankback attempts.
- 15 4. A method as claimed in claim 1, characterized in that said crankback message includes a field containing a hop count, said field is decremented each time the message is forwarded by a network node, and said crankback message self destructs when the hop count reaches a predetermined value.
5. A method as claimed in claim 1, characterized in that when a receiving node
20 detects a routing loop in a call setup request message received from an adjacent node, said receiving node returns said setup request message to said adjacent node with a crankback message, and said adjacent node responds to said crankback message to forward said setup request message on its alternate route stored in its routing tables.

1/1

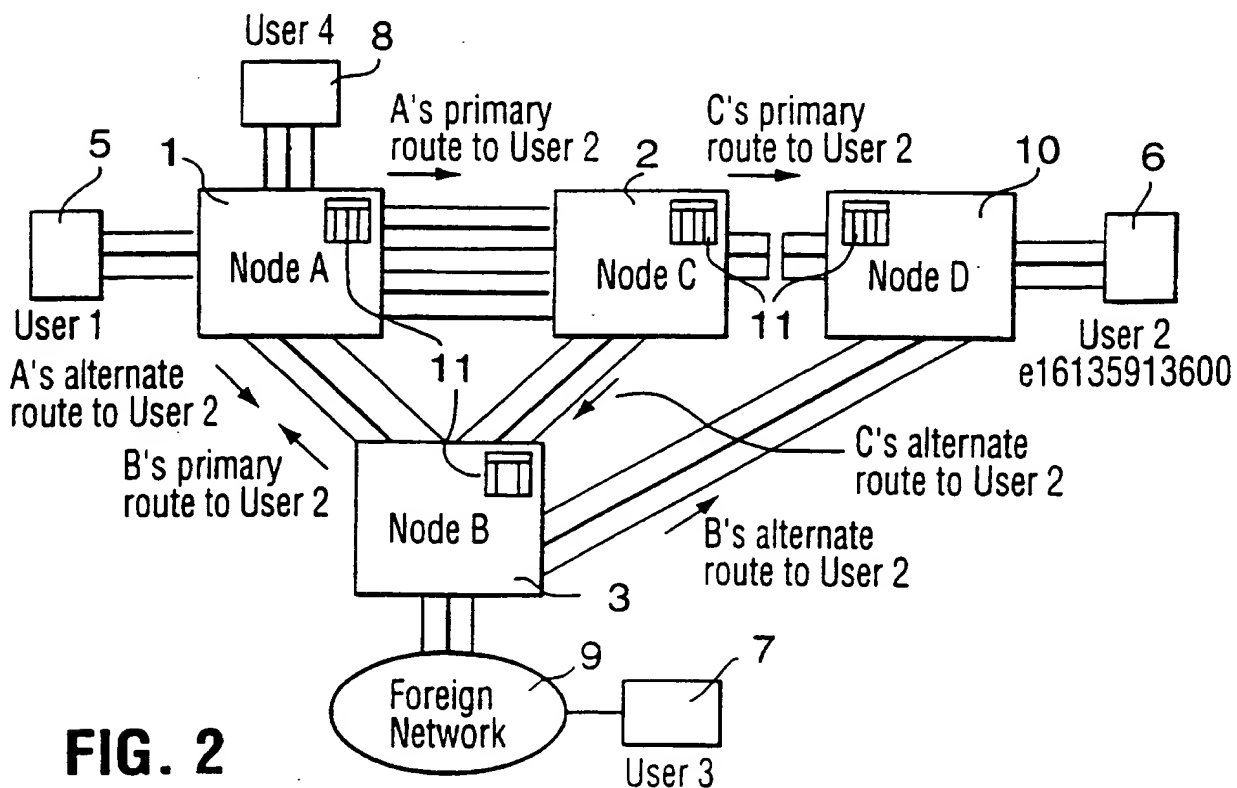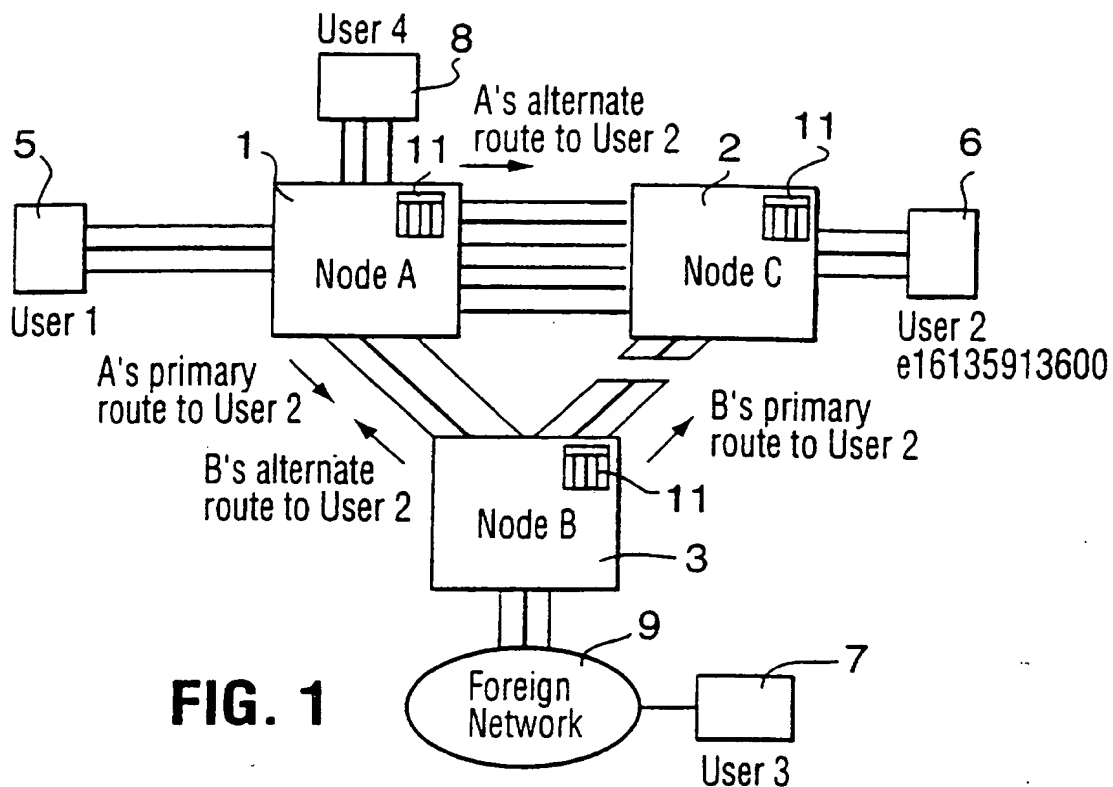

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CA 96/00710

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PROCEEDINGS OF THE GLOBAL TELECOMMUNICATIONS CONFERENCE (GLOBECOM), SAN FRANCISCO, NOV. 28 - DEC. 2, 1994, vol. 2 OF 3, 28 November 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 1224-1230, XP000488730 SPIEGEL E M ET AL: "AN ALTERNATE PATH ROUTING SCHEME SUPPORTING QOS AND FAST CONNECTION SETUP IN ATM NETWORKS" see paragraph 2 see paragraph 3	1-5
A	US,A,4 345 116 (ASH GERALD R ET AL) 17 August 1982 see column 5, line 21 - line 38 see claims 5,6 -/-	1-5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

23 January 1997

Date of mailing of the international search report

11.02.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Perez Perez, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 96/00710

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	13TH ANNUAL CONFERENCE ON EUROPEAN FIBRE OPTICS COMMUNICATIONS AND NETWORKS, vol. 2, June 1995, UK, pages 97-101, XP000614553 G. SCHRODER : "Operation and maintenance (OAM) mechanisms for layer management in ATM networks" see page 97, right-hand column, line 36 - page 98, left-hand column, line 17 ---	1
A	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 18, no. 9, February 1976, NEW YORK US, pages 3059-3062, XP002023625 "Explicit path routing for switching network" see the whole document -----	1,4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/CA 96/00710

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4345116	17-08-82	NONE	